


# Manual: No. 1990

# FITTING


## *Murax P110 Shutter*

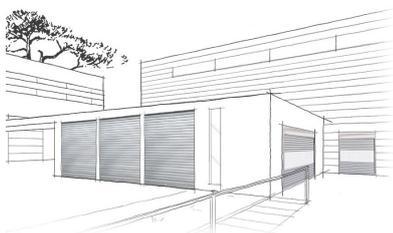

### *Steel hooks for hurricane slides*

**Inner winding / Axle diameter = 220 mm**

**OUTER SIDE**

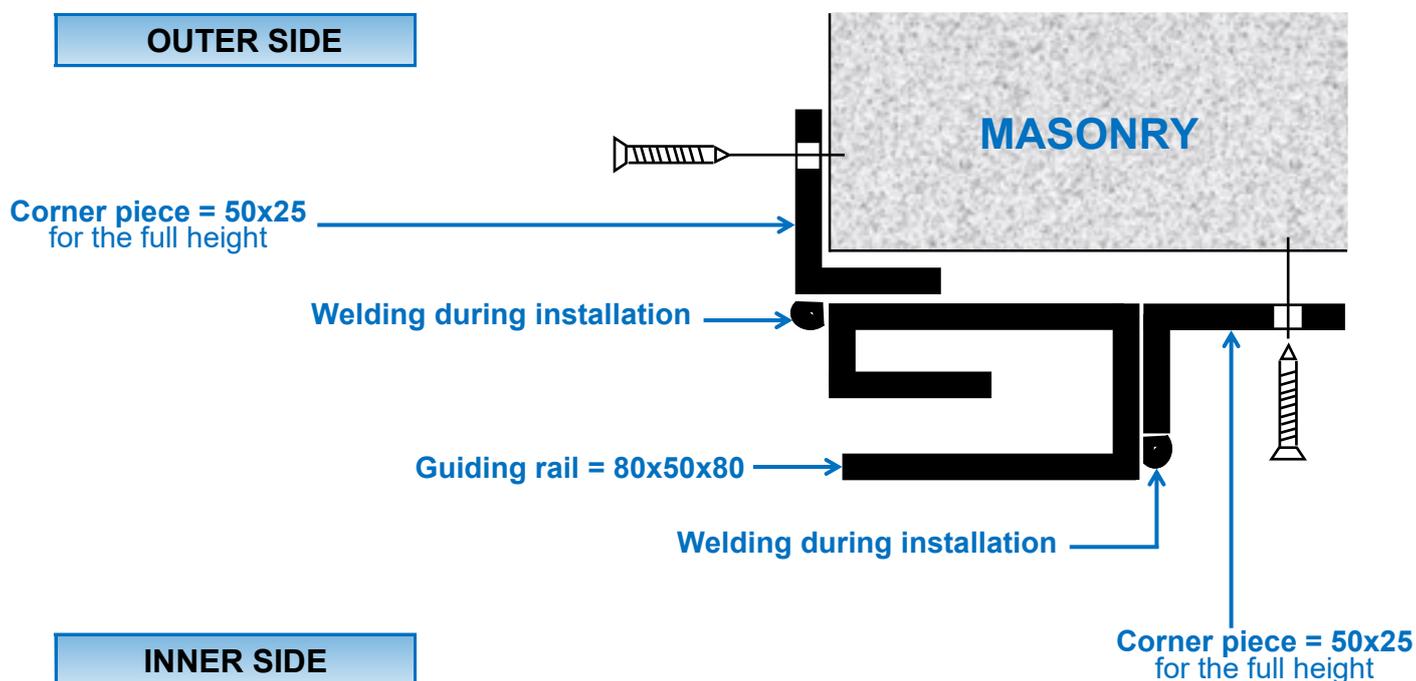


**INNER SIDE**

 If the clamps are welded onto the guiding rail:  
The corner piece 50x25 must be recut in order to fix it between the clamps.

(Document reserved for installers)

 **It is essential to follow the assembly order of the slats, starting from the winding axle (non-compliance will lead to incorrect functioning)**

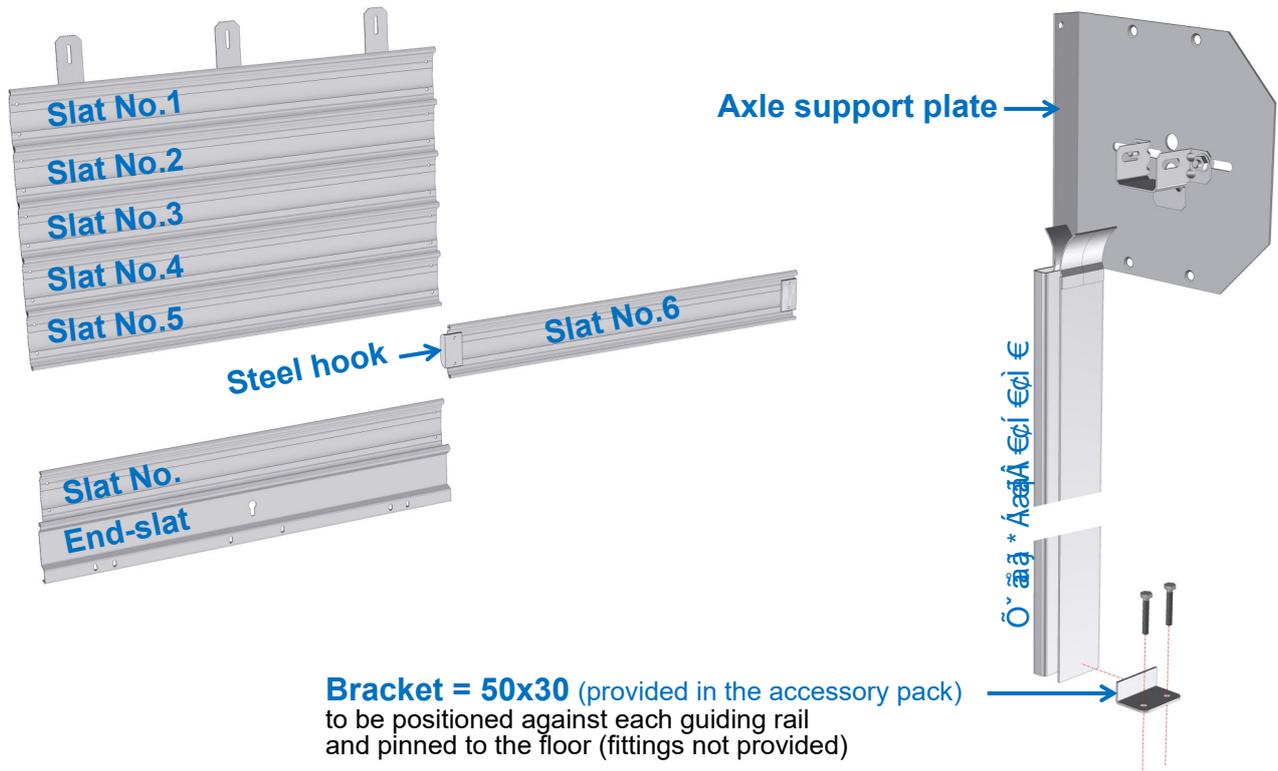

**No. of slats with steel hooks, for axle of Ø220 mm**  
 6 - 11 - 16 - 21 - 26 - 31 - 36 - 39 - 43 - 47 - 50 - 54 - 58 - 62 - 66 - 70 - 74 - 79

**Clearance to be maintained for shutters equipped with steel hurricane hooks**

**Important:** Slats with steel hooks must be arranged as per the order stipulated above. Non-compliance with the assembly order of slats will lead to incorrect functioning.

