


MICRO SWITCH on LOCK INSTALLATION and CONNECTION



ASSEMBLY ON THE LEFT

ASSEMBLY ON THE RIGHT

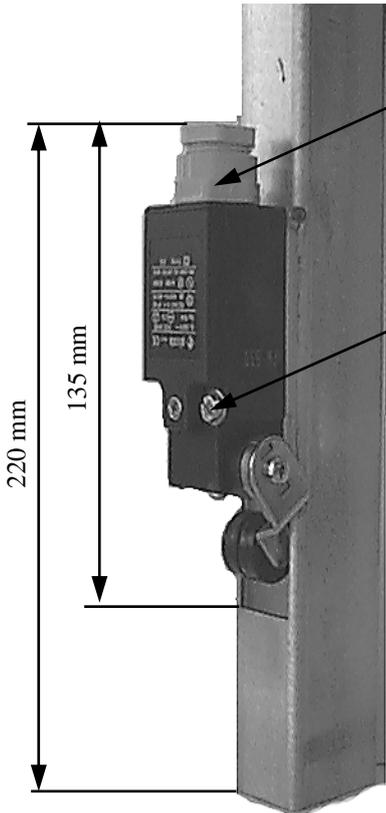


CABLE GLAND

CLAMP SCREW M4 x 30
+ WASHERS Ø 4

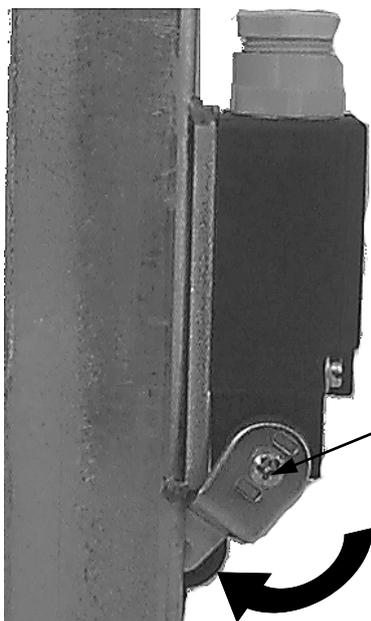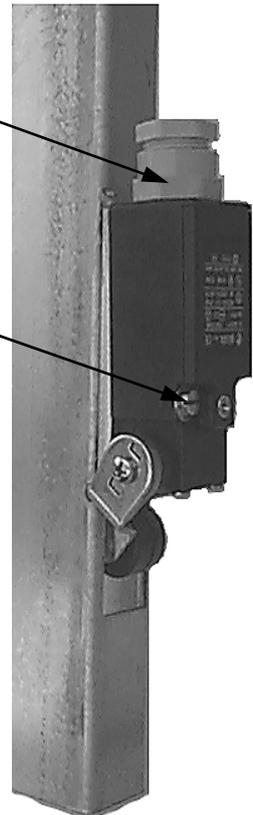

ADJUSTMENT SCREW

TOP VIEW

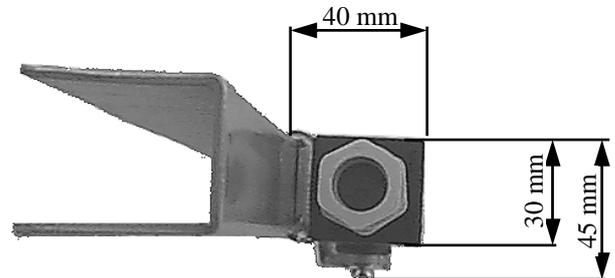


After having loosened the screw, push the roller as far as it will go into the guiding rail and then retighten the screw

CONNECTING the SAFETY MICRO SWITCH

PRINCIPLE : The safety micro switch cuts the current in ascent phase which powers the operator when the lock is closed.

PLEASE NOTE: Refer to the power supply and control box manuals provided.

Assembly with a key switch box

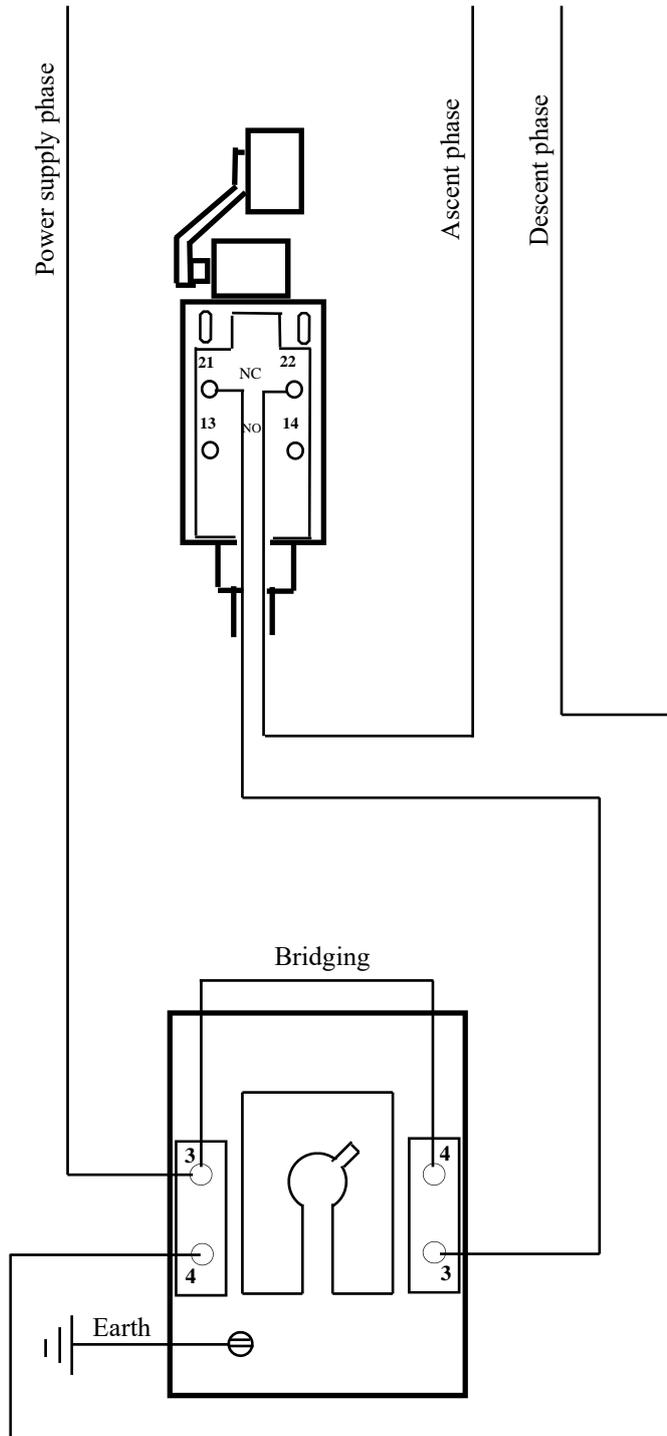

Assembly with a button

